



CAFLON Si-HYBRID

Long life Antifreeze with Organic Acid
Technology and Silicates



univarsolutions.com

CAFLON Si-HYBRID

- Is an ethylene glycol based coolant concentrate formulated for use in all engines including those constructed from aluminium alloys.
- Provides all year-round frost and corrosion protection. It is recommended to dilute the material 50vol. % in the final coolant solution. This provides frost protection to -38°C.
- Contains an inhibitor package based on salts of Organic Acid's and silicates (Hybrid Coolant).
- Is supplied [blue/green](#) in colour and contains a bittering agent.

Performance, Features & Benefits:

- Offers outstanding protection against corrosion, overheating and frost.
- Is a 'Long life' coolant due to the slow depletion rates of the OAT inhibitors versus traditional inorganic / mineral variants.
- Adopts low silicate technology that boosts overall corrosion protection (in particular against aluminium).
- Contains silicate stabilisers to prevent the formation of silicate gel often observed with inferior formulations / products.
- The exceptional thermal stability eliminates the risks of deposits particularly near the cylinder head, engine block, radiator, water pump and heat exchanger.
- Is Nap Free (Nitrite, Amine, Phosphate).
- Has excellent hard water stability.
- Exceeds the requirements of most European and International Standards; - BS 6580 (2010), ASTM D3306, SAE J1034



DILUTION

CAFLON Si-HYBRID must be diluted with water before use (ideally with DI water). It is hard water compatible and can be mixed with tap water (*) before filling into the cooling system. (*) water quality should not exceed the following limits;

- Water Hardness 0 - 20° dH (0 - 3.6mmol/l)
- Chloride content 100 ppm max
- Sulphate content 100 ppm max
- CAFLON Si-HYBRID can also be supplied pre-diluted

Typical Properties (Not a Specification)	CAFLON Si-HYBRID	ASTM D3306
Appearance @ 20°C	Clear blue/green liquid (*)	Not specified
Relative Density 15.5/15.5°C (60/60°F)	1.120	1.110 - 1.145
Freezing Point (°C) 50 vol % in DI water	-38.0	-36.4°C max
Boiling Point (°C) 50 vol % in DI water	109°C	108°C min
pH (neat)	7.3	Not specified
pH, 50 vol % in DI water	8.1	7.5 - 11.0
pH, 33 vol % in DI water	8.2	
Reserve Alkalinity @ pH 5.5	8.5	Report
Water (% w/w - Karl Fischer)	4	5 max
Flash Point (°C)	>120	
Foaming Properties (ASTM D1881) Vol. (ml)	40	150 max
Break (s)	1	5 max

CORROSION PROTECTION

Glassware Corrosion Test - ASTM D 1384

ASTM D 1384¹ Test Results



ASTM D 1384	Specimen Corrosion Weight Loss (mg)				
Specimen	#1	#2	#3	Avg	Max**
Copper	1	1	1	1	10
Solder	1	0	0	0	30
Brass	2	1	1	1	10
Steel	0	1	1	1	10
Cast Iron	1	2	2	2	10
Cast Aluminium	-2	-2	-2	-2	30

** Maximum corrosion weight loss as specified by ASTM D3306


Corrosion of Aluminium under Heat Rejecting Conditions - ASTM D 4340

ASTM D 4340¹ Test Results


Run #1 Weight Loss (mg/cm ² /wk)	Run #2 Weight Loss (mg/cm ² /wk)	Average Weight Loss (mg/cm ² /wk)	ASTM Limit ** (mg/cm ² /wk)
-0.03	-0.02	-0.02	1.00
pH After (1)	pH After (2)	Appearance	
8.62	8.62	No Visible Deposit	

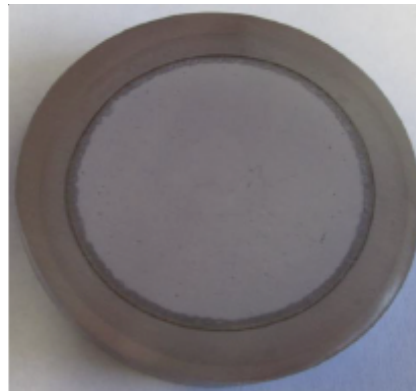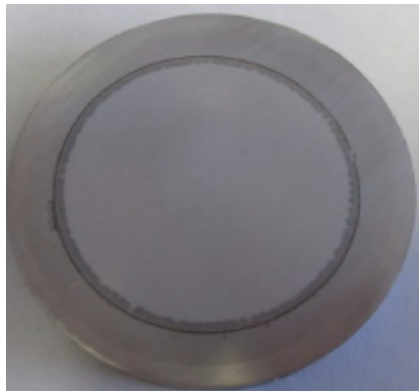


Copper

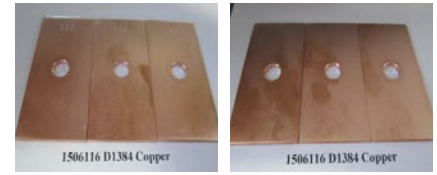


Solder

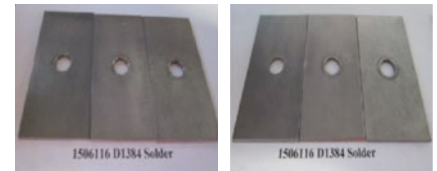


Brass

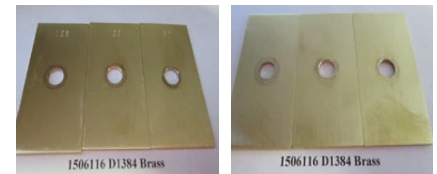

Steel

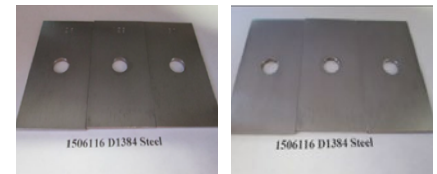

Cast Iron

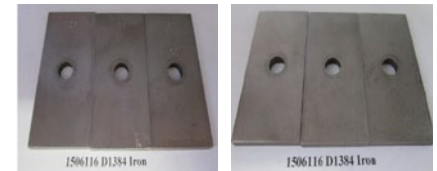

Cast Aluminium



STORAGE

CAFLON Si-HYBRID has a shelf life of two years when stored in originally closed, air-tight containers at temperatures $\leq 30^{\circ}\text{C}$.

AVAILABILITY

20 & 25 LITRE KEGS



1000 LITRE IBC's



205 LITRE DRUMS



BULK



Mixing **CAFLON Si-HYBRID** with other coolants is not recommended.

Univar in the UK

Pine Street
South Bank Road
Middlesbrough
TS3 8BD

T + 44(0) 1642 227388

F + 44(0) 1642 221958

univarservices@univar.com

univarsolutions.com

© 2019. Univar BV. All rights reserved. Univar Solutions, the collaboration insignia, and other identified trademarks are the property of Univar Inc. or affiliated companies. All other trademarks not owned by Univar Inc. or affiliated companies that appear in this material are the property of their respective owners. Univar Solutions makes no representations and warranties as to the statements of third party producers or manufacturers included in this material. Always read and follow label directions. The information contained herein can be changed without notice and you should contact the manufacturer to confirm. Read and follow the Product Label and Safety Data Sheet ("SDS") for your health. All information is based on data obtained from the manufacturer or other recognized technical sources. Univar Inc. and its affiliates ("Univar") provides this information "as is" and makes no representation or warranty, express, or implied, concerning the accuracy or sufficiency of the information and disclaims all implied warranties. Univar is not liable for any damages resulting from the use or non-use of the information and each Univar affiliate is responsible for its own actions. All transactions involving this Product(s) are subject to Univar's standard Terms and Conditions, available at www.univarsolutions.com or upon request. 000011546-2019

 **Univar Solutions**

