



CAFLON OAT

Long life Antifreeze with Organic Acid
Technology corrosion protection



univarsolutions.com

CAFLON OAT

- Is an ethylene glycol based coolant concentrate formulated for use in all engines including those constructed from aluminium alloys.
- Provides all year-round frost and corrosion protection. It is recommended to dilute the material 50 vol. % in the final coolant solution. This provides frost protection to -37°C.
- Contains an inhibitor package based on Organic Acid Technology (OAT).
- Is supplied red in colour and contains a bittering agent.

Performance, Features & Benefits:

- Offers outstanding protection against corrosion, overheating and frost.
- Long life' antifreeze.
- The exceptional thermal stability eliminates the risks of deposits particularly near the cylinder head, engine block, radiator, water pump and heat exchanger.
- Is Nitrite, Amine, Phosphate (NAP free), borate and silicate free.
- Meets the requirements of BS:6580 (2010), ASTM D3306, SAE J1034, ASTM D6210, AFNOR R15-601 (with the exception of reserve alkalinity)
- Meets the performance requirements of DAF 74002, MB325.3, MTU MTL 5048, VW TL 774-D/F, MAN 324 SNF, Cummins CES 14603, Volvo VCS 418-0001

Typical Properties (Not a Specification)	CAFLON OAT	ASTM D3306
Appearance @ 20°C	Clear red liquid (*)	Not specified
Relative Density 15.5/15.5°C (60/60°F)	1.120	1.110 – 1.145
Freezing Point (°C) 50 vol % in DI water	-37.0	-36.4°C max
Boiling Point (°C) 50 vol % in DI water	109°C	108°C min
pH, 50 vol % in DI water	7.9	7.5 – 11.0
Reserve Alkalinity @ pH 5.5	3.0 typical	Report
Foaming Properties (ASTM D1881)		
Vol. (ml)	Pass	150 max
Break (s)	Pass	5 max

DILUTION

CAFLON OAT must be diluted with water before use (ideally with DI water). It is hard water compatible and can be mixed with tap water (*) before filling into the cooling system.

(*) water quality should not exceed the following limits;

- Water Hardness: 0 - 20° dH (0 – 3.6mmol/l)
- Chloride content: 100 ppm max
- Sulphate content: 100 ppm max
- CAFLON OAT can also be supplied pre-diluted



(*) Can be supplied colourless also



CORROSION PROTECTION
Glassware Corrosion Test – ASTM D 1384


ASTM D 1384 ¹ Test Results					
ASTM D 1384	Specimen Corrosion Weight Loss (mg)				
Specimen	#1	#2	#3	Avg	Max**
Copper	1	1	1	1	10
Solder	1	1	0	1	30
Brass	1	1	1	1	10
Steel	1	1	1	1	10
Cast Iron	0	2	2	1	10
Cast Aluminium	4	6	4	5	30

Corrosion of Aluminium under heat rejecting conditions - ASTM D 4340


ASTM D 4340 ¹ Test Results			
Run #1 Weight Loss (mg/cm ² /wk)	Run #2 Weight Loss (mg/cm ² /wk)	Average Weight Loss (mg/cm ² /wk)	ASTM Limit** (mg/cm ² /wk)
-0.08	-0.02	-0.05	1.00

** Limits published in ASTM D3306 Standard Specification for Gycol Base Engine Coolant for Automobile and Light Duty Service. These performance limits are also required for heavy-duty coolants and recycled coolants. A negative number indicates a net weight gain after correcting for the cleaning bank. (refer to the published method information on the calculations).


Copper

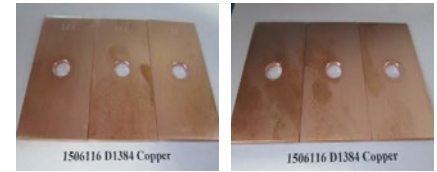


Solder

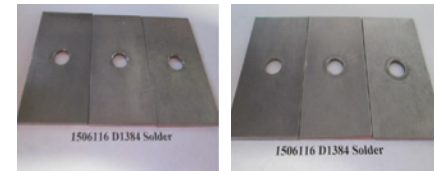


Brass

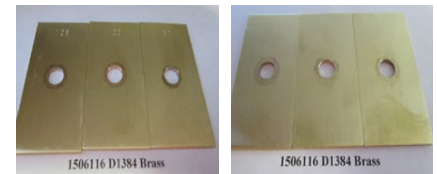


Steel

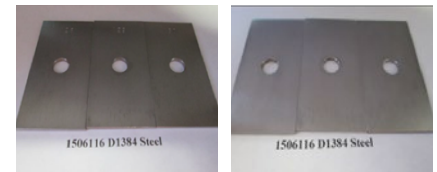

Cast Iron

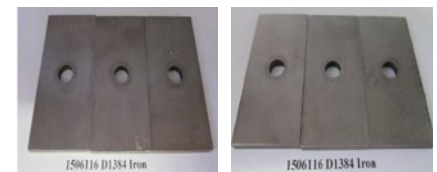

Cast Aluminium

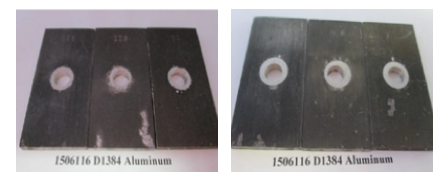

STORAGE

CAFLON OAT has a shelf life of two years when stored in originally closed, air-tight containers at temperatures $\leq 30^{\circ}\text{C}$.

AVAILABILITY

20 & 25 LITRE KEGS



1000 LITRE IBC's



205 LITRE DRUMS



BULK



Mixing **CAFLON OAT** with other coolants is not recommended.

Univar in the UK

Pine Street
South Bank Road
Middlesbrough
TS3 8BD

T + 44(0) 1642 227388

F + 44(0) 1642 221958

univarservices@univar.com

univarsolutions.com

© 2019, Univar BV. All rights reserved. Univar Solutions, the collaboration insignia, and other identified trademarks are the property of Univar Inc. or affiliated companies. All other trademarks not owned by Univar Inc. or affiliated companies that appear in this material are the property of their respective owners. Univar Solutions makes no representations and warranties as to the statements of third party producers or manufacturers included in this material. Always read and follow label directions. The information contained herein can be changed without notice and you should contact the manufacturer to confirm. Read and follow the Product Label and Safety Data Sheet ("SDS") for your health. All information is based on data obtained from the manufacturer or other recognized technical sources. Univar Inc. and its affiliates ("Univar") provides this information "as is" and makes no representation or warranty, express, or implied, concerning the accuracy or sufficiency of the information and disclaims all implied warranties. Univar is not liable for any damages resulting from the use or non-use of the information and each Univar affiliate is responsible for its own actions. All transactions involving this Product(s) are subject to Univar's standard Terms and Conditions, available at www.univarsolutions.com or upon request. 000011545-2019

 **Univar Solutions**

